

BlueEyes[®]

DDS Editor



Operation manual

Ver. 1.0.5.5

2022/08/12

www.BlueEyestech.com



Operation manual

□ BlueEyes DDS Editor

Thank you for using the product of BlueEyes Technology.

The manual will introduce the product of BlueEyes Technology. Please read the manual before you start using the product.

Though the information in the manual has been verified before publish, the actual specification should be based on the actual shipment. BlueEyes Technology doesn't have to guarantee, proclaim or declare for the content, along with other purpose. In addition, the product specification and information that mentioned in the manual is for reference only. The content might be update at any time without notice. If there is any mistake of the information, including software, firmware, and hardware that mentioned in the manual BlueEyes Technology has no responsibility for the mistake.

Please reach BlueEyes website to get the upgrade of the product specification, our company will not notice you. If you want to get the latest product information, operation manual, firmware, or you have any question to the products of BlueEyes Technology, please contact your local agent or go to the official website of BlueEyes Technology for further information.

It is not allowed to copy/ use the content or to change the information and publishing of the manual without BlueEyes Technology's written consent.

Copyright 2016 BlueEyes Technology Inc. All Rights Reserved.

BlueEyes Technology Corp.

Add: 7F-3, No.200, Sec. 4, Wenxin Rd., North District, Taichung City 40462, Taiwan

TEL: +886 4 2297 0977 / +886 982 842 977

Fax: +886 4 2297 0957

E-mail : support@blueeyes.com.tw

Website: www.BlueEyestech.com



Index

1. Introduction	4
1.1 About the manual.....	4
1.2 Intellectual Property Rights	4
1.3 About the manual.....	4
2. Installation.....	5
3. DDS Editor.....	8
3.1 Change language	8
3.2 Add template	8
3.3 Built-in Template.....	9
3.4 Custom Template	11
4. Video	16
4.1 Local Video	16
4.2 4K Video.....	19
4.3 YouTube (This function is no longer available).....	22
4.4 Streaming video.....	22
5. Image	23
5.1 Picture.....	23
5.2 PDF	25
6. Text	26
6.1 Static Text	26
6.2 Scrolling Text.....	27
6.3 RSS.....	28
7. Weather (This function is no longer available).....	28
8. Date/Time	28
9. URL	29
10. Settings.....	30
10.1 Loop Play	31
10.2 Multiple Loop Play	31
10.3 Time Schedule	32
11. Save.....	34
12. Export	35

12.1 By USB/SD	35
12.2 Through Network	36
13. Q&A	38
【 Question1 】 How many template can add in an archive?	38
【 Question2 】 Could DDS Editor save custom template form?	38
【 Question3 】 How to set hibernation?	38

1. Introduction

1.1 About the manual

The manual can help you understand the function and operation methods of DDS player

- The company suggested you that if you store all written records of important information, in some cases, it may cause data loss and change in the electrical storage. Therefore the company is not responsible for the data loss that is caused by improper use, maintenance, defects, expire or any other reason.
- The company is not responsible for the economy loss that is caused by the third party or other function, such as the DIY firmware, the information loss or change.
- The pictures of operation manual may be different from the actual product, this is because of the software version changes.
- If there are changes of the information in the manual, we would not notice you. Please go to the official website of BlueEyes Technology.
- The company would not be responsible for the information downloaded from the website.

1.2 Intellectual Property Rights

According to the Intellectual Property Rights, the copy, changes, or usage of copyrighted pictures and music are only for personal or private use. If the user does not have a wider range of copyright or not explicit consent of the copyright owner and unauthorized copying, change or use the copies of this way to change or make or amendment, then it would be viewed as violating copyright laws. The copyright owner is entitled to claim for loss. For this reason, do not illegally use copyrighted materials.

1.3 About the manual

- Please read the instructions carefully before use, our company is not responsible for the artificial problems caused by incorrect use of the product.
- Read and keep instructions properly. Operate according to instructions in the operation manual.
- The pictures on the manual may be different from the pictures on the monitor. This is because the software version is different.

2. Installation


Step One 、 Download DDS Editor

Download DDS Editor from BlueEyes website(<http://dds.blueeyes.com.tw>)




Step Two 、 Start to install


Click Next button.

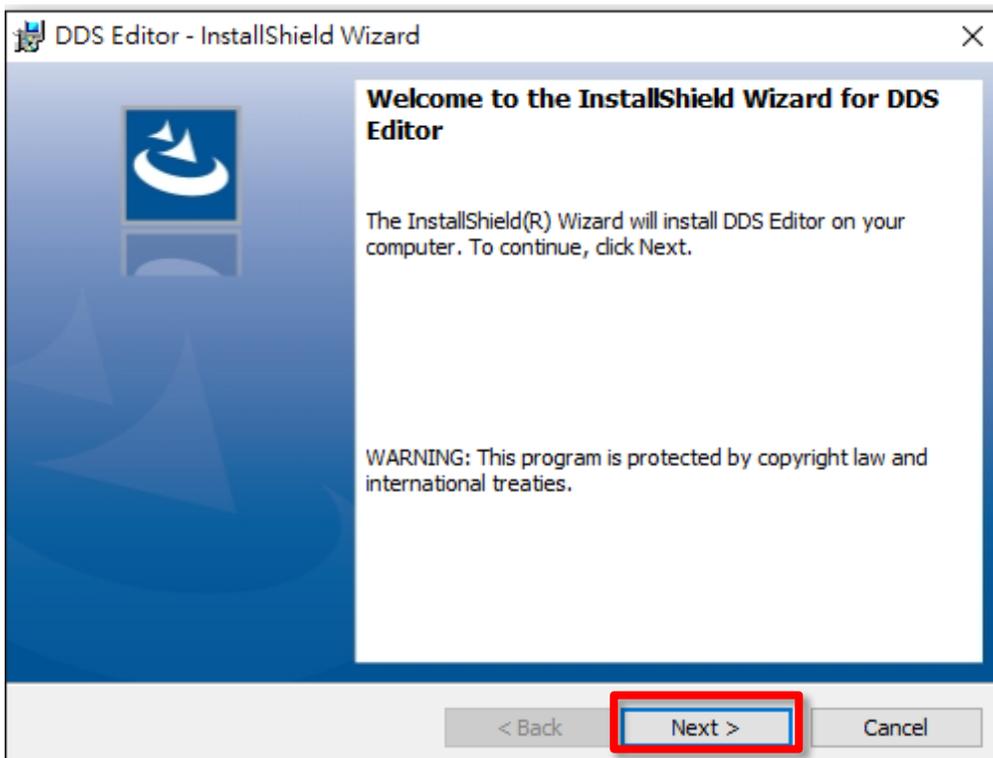


Click Next button.

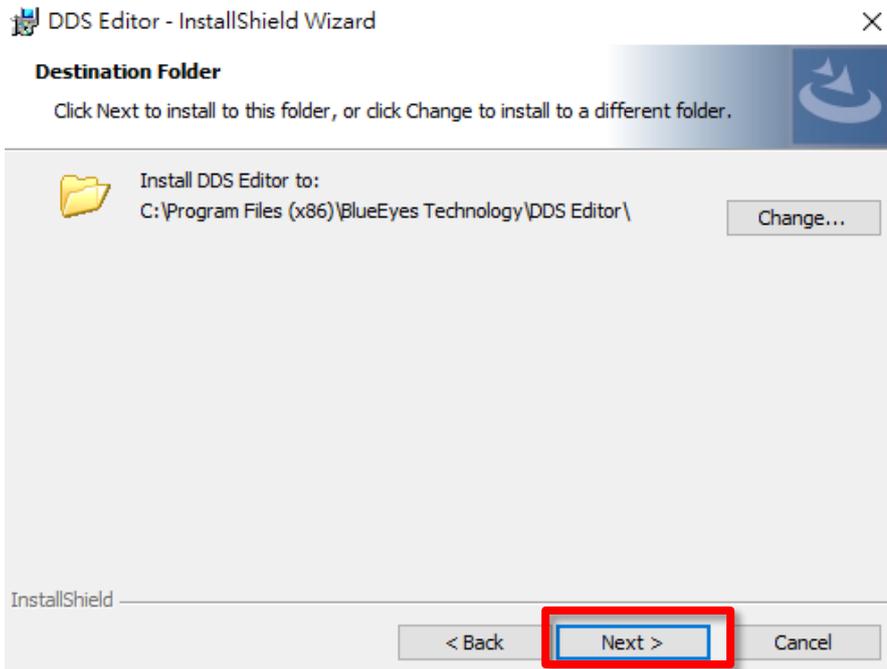

Click Install button.

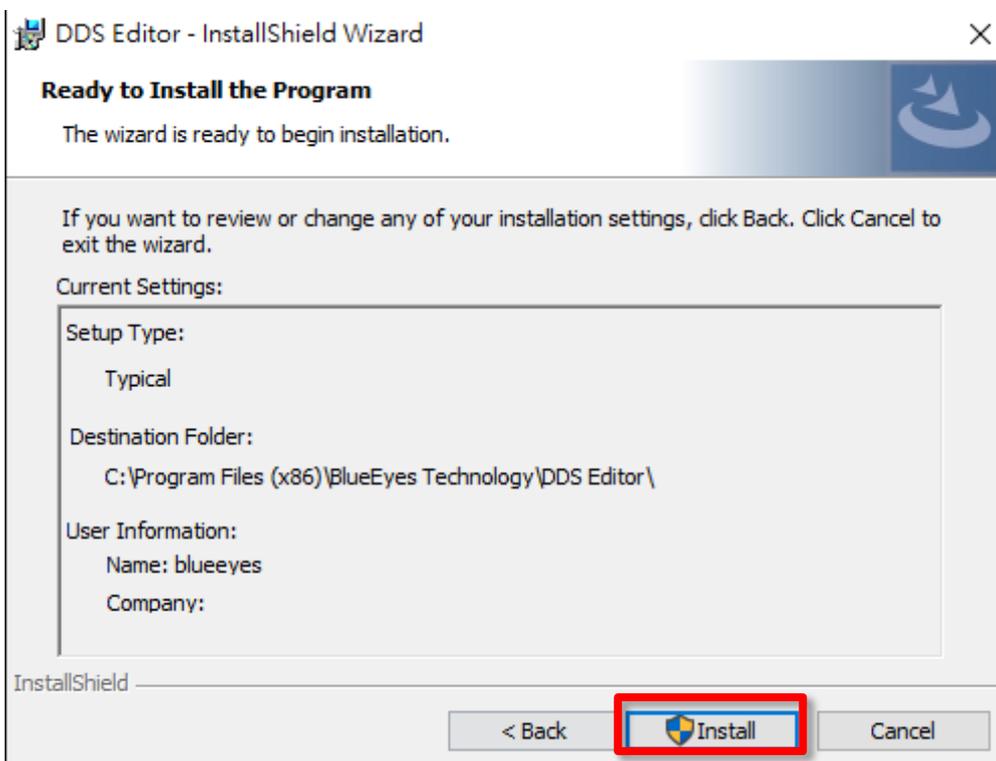

Click Finish button.

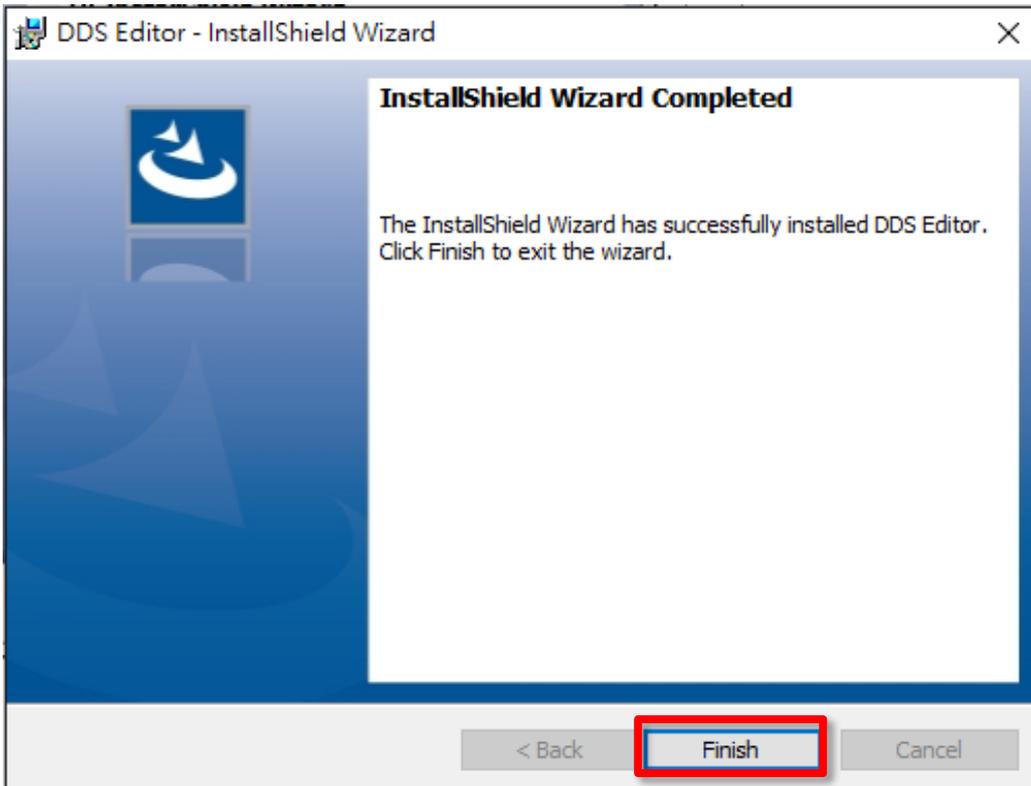

After install DDS Editor successfully, the DDS Editor application icon as below display on desktop.




3. DDS Editor

DDS Editor support English、 Traditional Chinese and Simplified Chinese interface. When default language of PC Windows System is Traditional Chinese, DDS Editor is Traditional Chinese interface. When default language of PC Windows System is Simplified Chinese, DDS Editor is Simplified Chinese interface. When default language of PC Windows System is English or other language, DDS Editor is English interface.


3.1 Change language

Tap menu tab at the top of the screen. Click Settings button and select language you want as your interface.

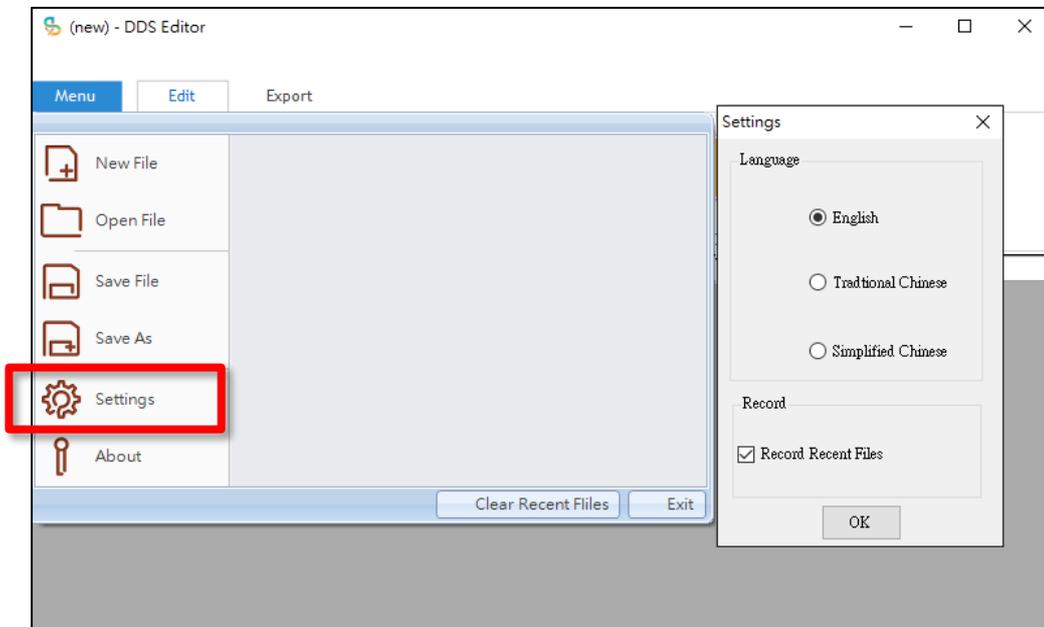

3.2 Add template

Click the add button.

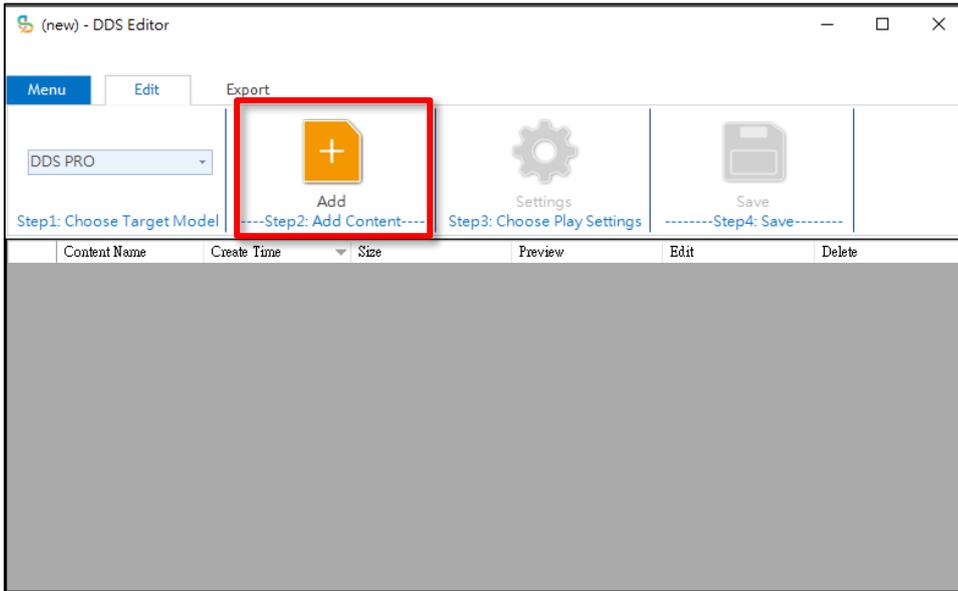

3.3 Built-in Template

There are 15 built-in template for you to choose

Notice: Please notice that the video resolution can not large than 1920x1080(1080P)

Template	Video	Marquee	Static text	Picture	Image slider
1	●	●	●	●	●
2	●	●		●	●
3	●				● (Right)
4	●				● (Left)
5	●			●(Right)	● (Right)
6	●			●(Left)	● (Left)
7	●				● (Left)
8	●				●(Right)
9	●	●	●		
10	●	●	●		●
11	●				●
12	●		●		
13	●	●	●(Above)		

14	●	●	●(Bottom)		
15	●	●			

3.4 Custom Template


Step One、 Choose custom template

Choose custom template




Step Two、 Choose Direction and resolution

You can choose Landscape、 Portrait(90 degrees anticlockwise). or Portrait.(90 degrees clockwise)

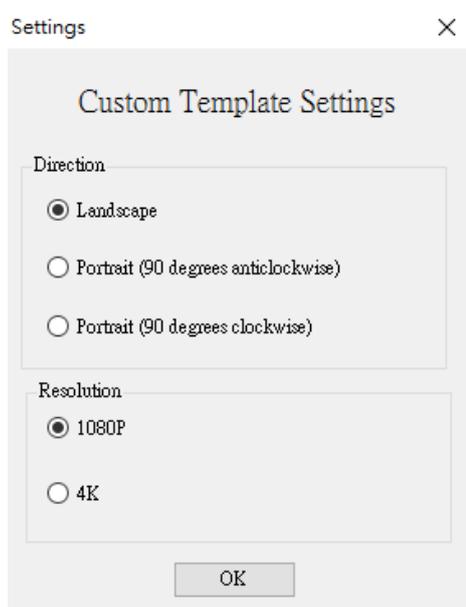


Step Three、 Background settings

Click Background Settings button at the left hand side.

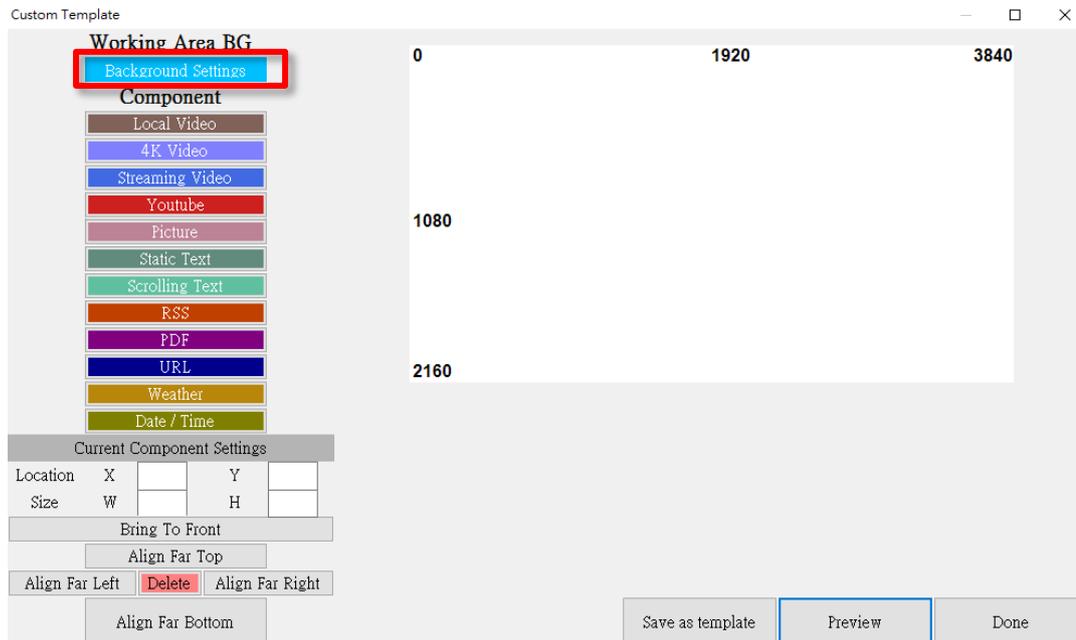

- Background color : Select and tap one color on your color wheel/table, you can preview what color you choose at the right hand side. Then, click OK button.
- Background image : Click browse button and choose one image as your background. Set opacity value to judge the image completely transparent to completely opaque. Then , click OK button.

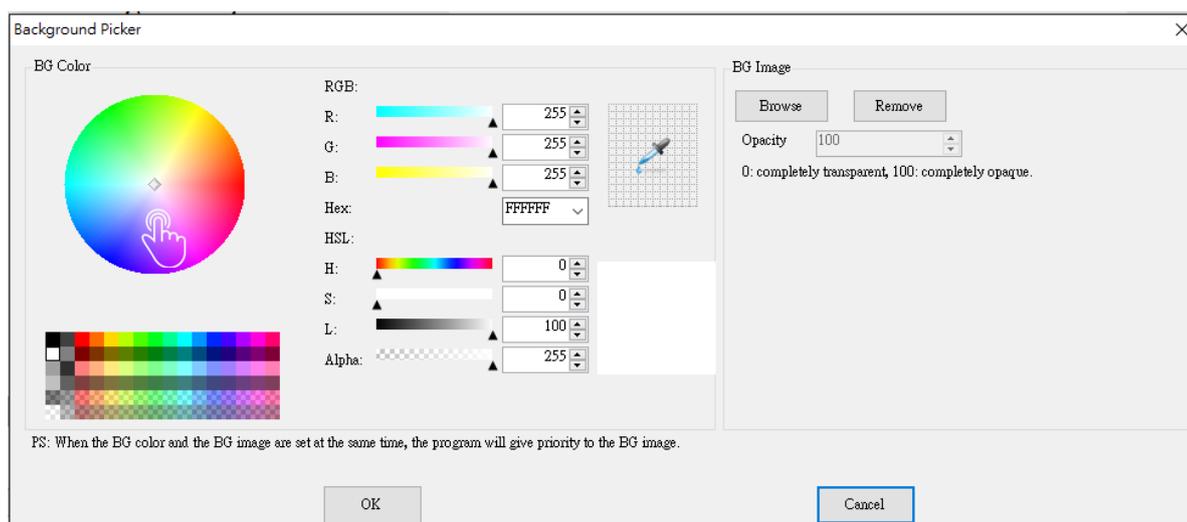


You'll see the chosen image in the working area.



Step Four, Setup the component you need

Include: Local video, Streaming video, Youtube, 4K video, Picture, Static text, Scrolling text, RSS, PDF, URL, Weather, Date/Time.

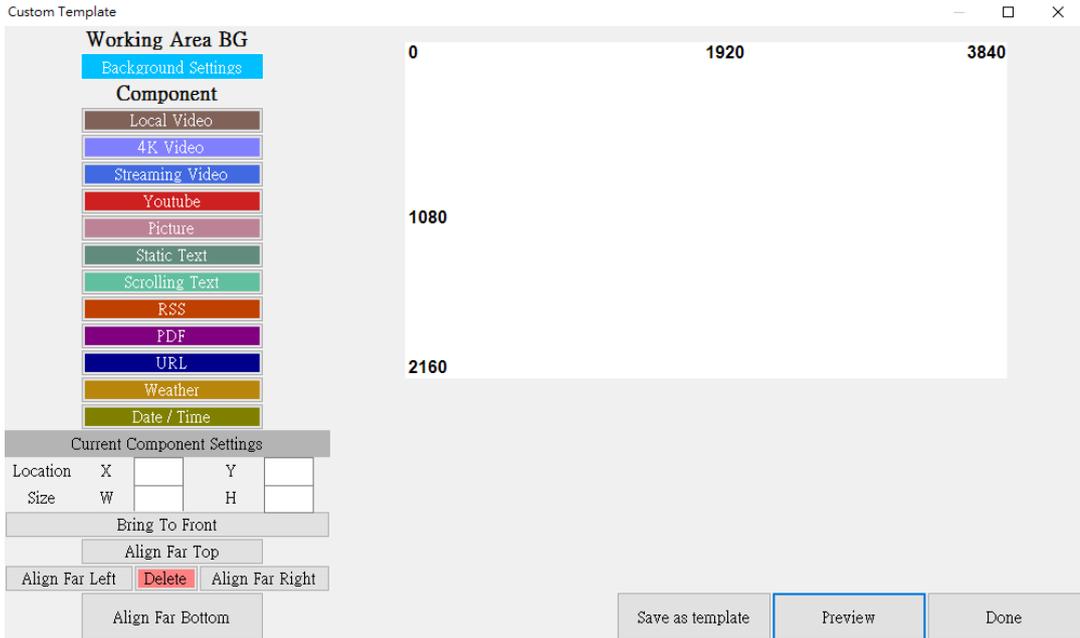

Step Five, Move and adjust the size of component


- Holding the component, the cursor key  means to move to another place.
- Move the mouse to left or right edges of component, the cursor key means to

change the size in the X –axis. Press and move around to adjust the size in the X – axis.

- Move the mouse to top or bottom edges of component, the cursor key means to change the size in the Y –axis. Press and move around to adjust the size in the Y– axis.
- Move the mouse to bottom right corner of component, the cursor key means to change scaling. Press and move to adjust the size.
- You can use the assistance tool at the lower left side. Manual to key in the current component location (X,Y)and size(W,H).


Step Six、 Preview

Select preview to check if everything is correct.

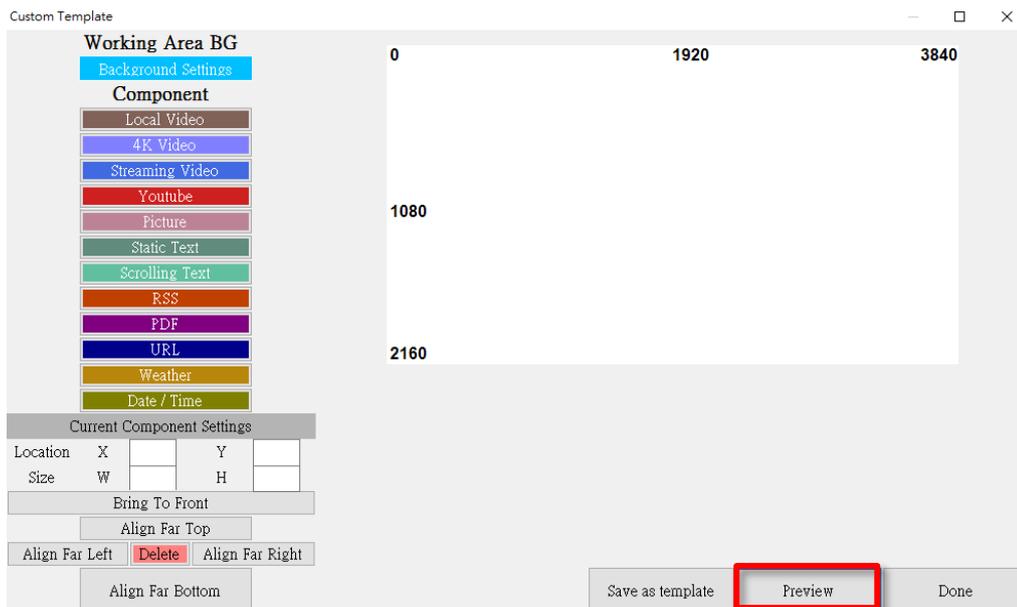

Step Seven, Done


Click Done button.

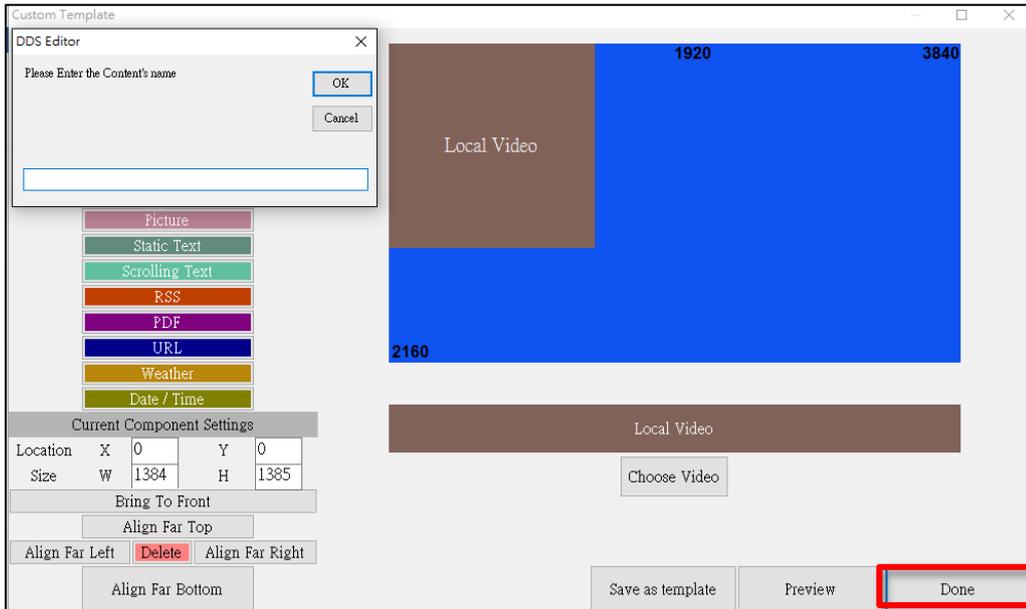


4. Video

4.1 Local Video


Click Local Video button at the left hand side and local Video component display in your working area.

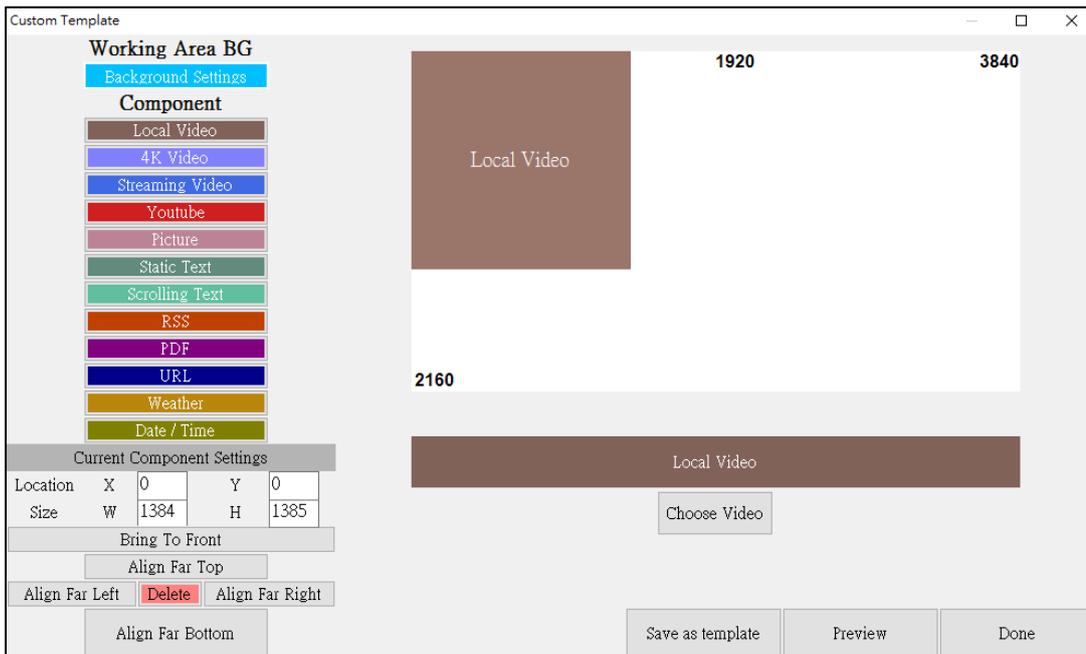


Click Choose Video button.

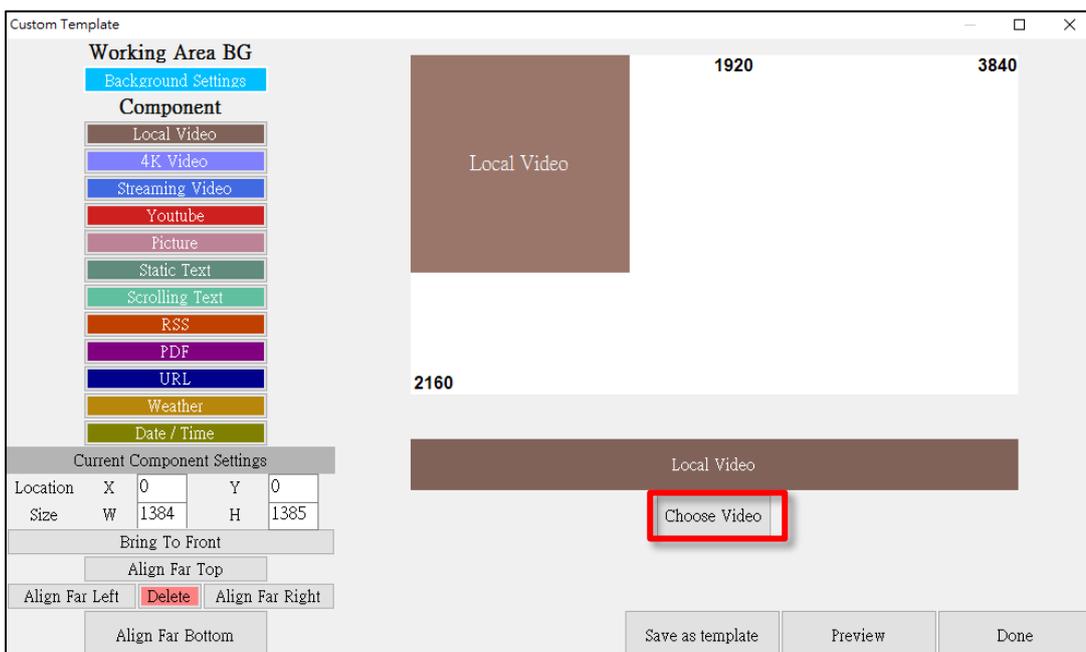


Click Add button

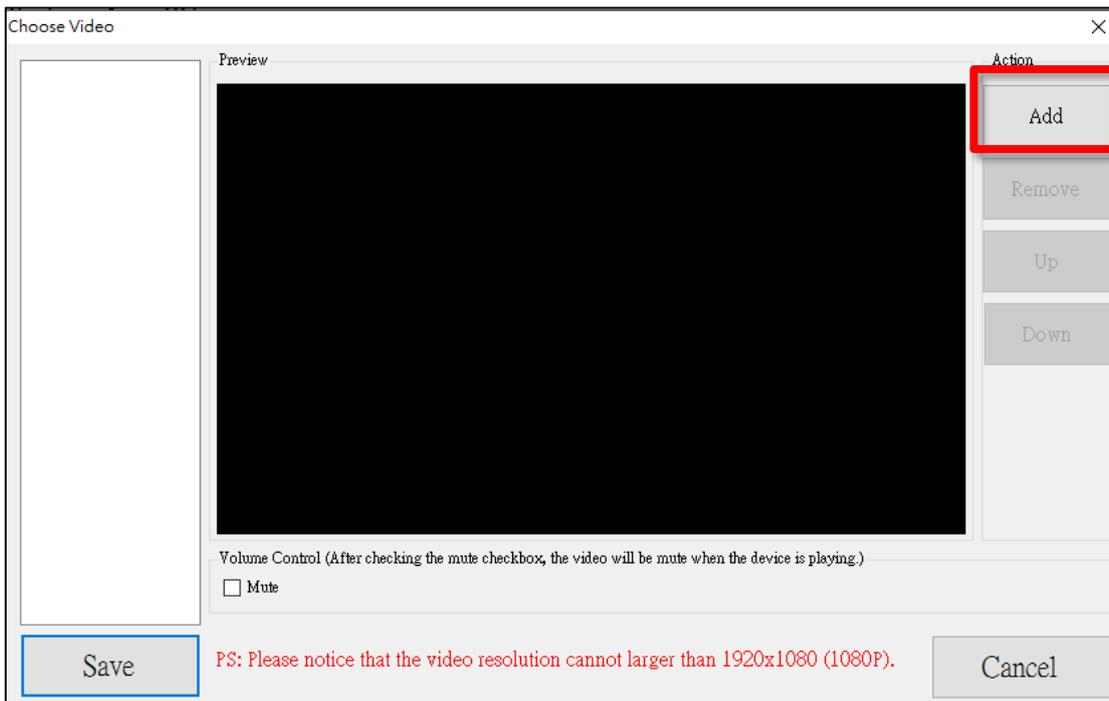

Browser the Video file (support multi videos) and click Open.

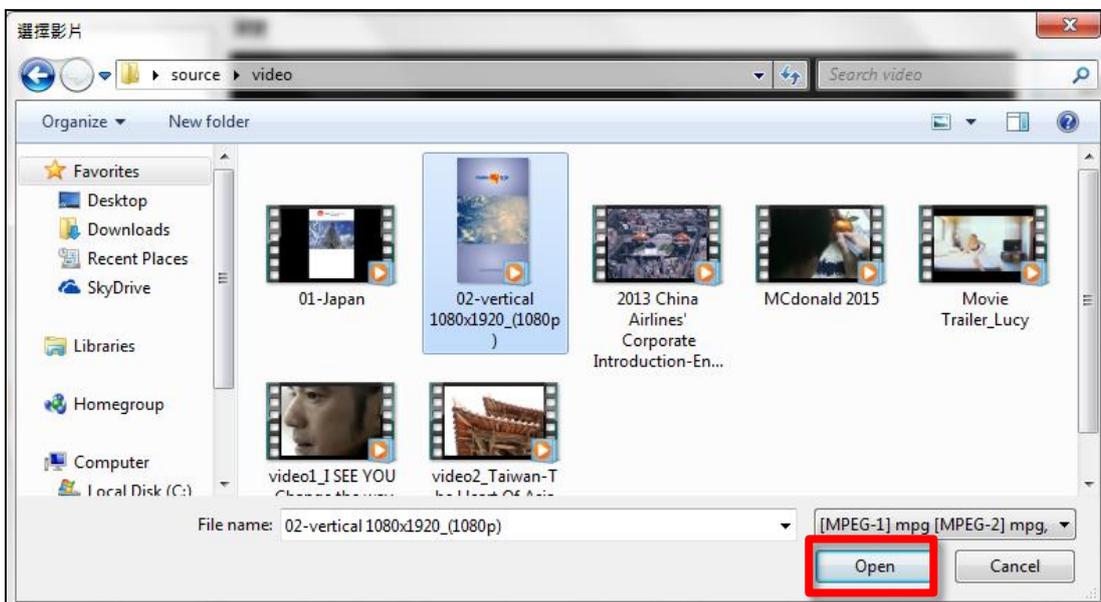


Choose video at the left hand side, video will be played at the middle area and click Save button.

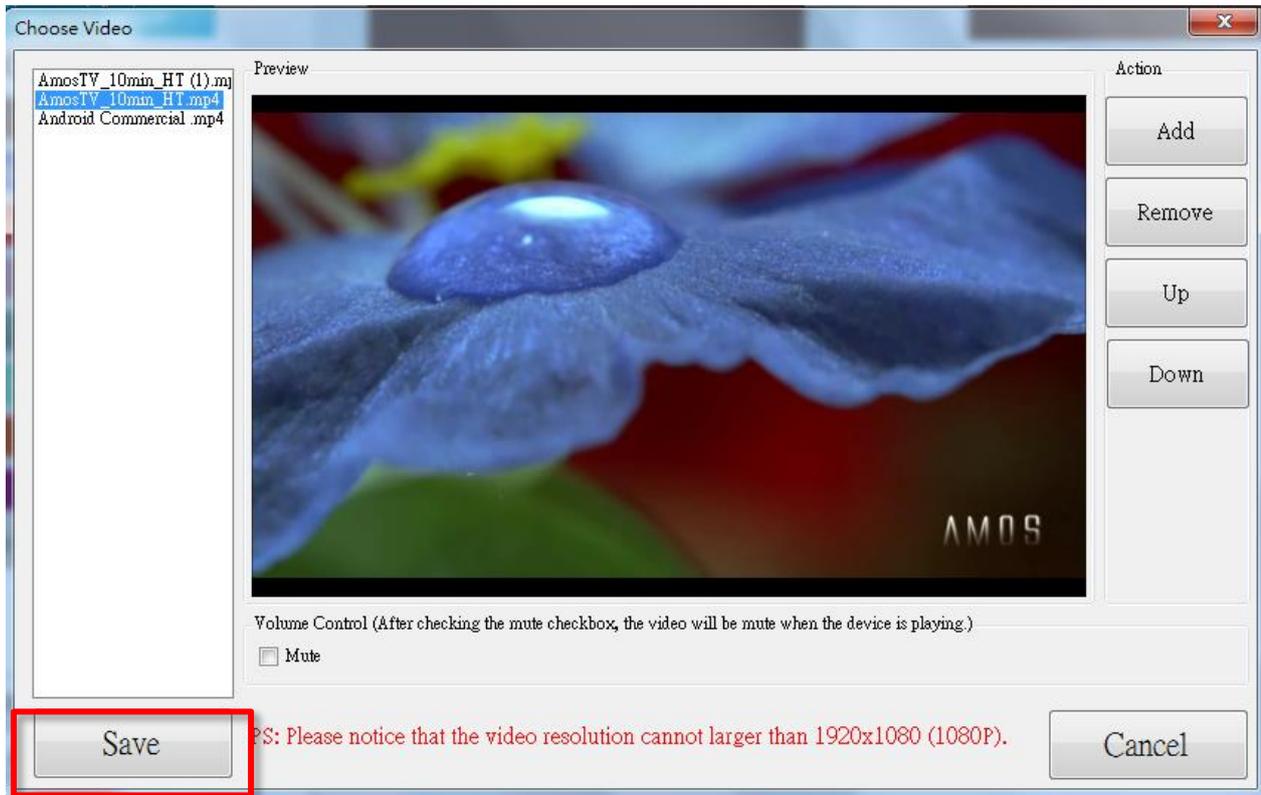


4.2 4K Video


Click 4K Video button at the left hand side and 4K Video component display in your working area.

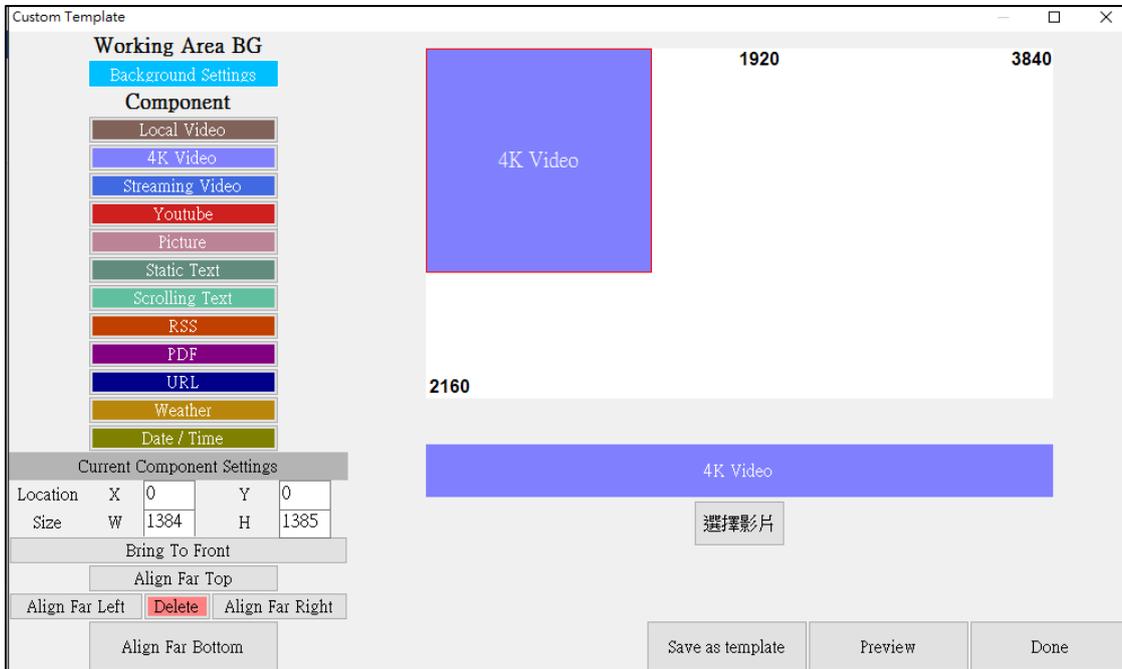


Click Choose Video button.

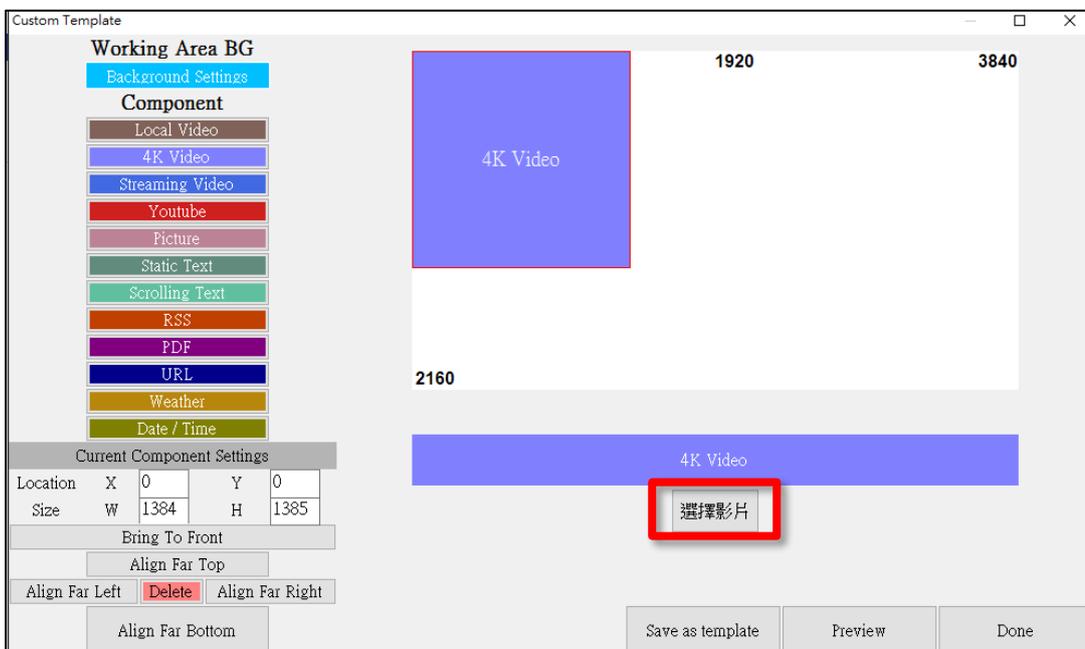


Click Add button

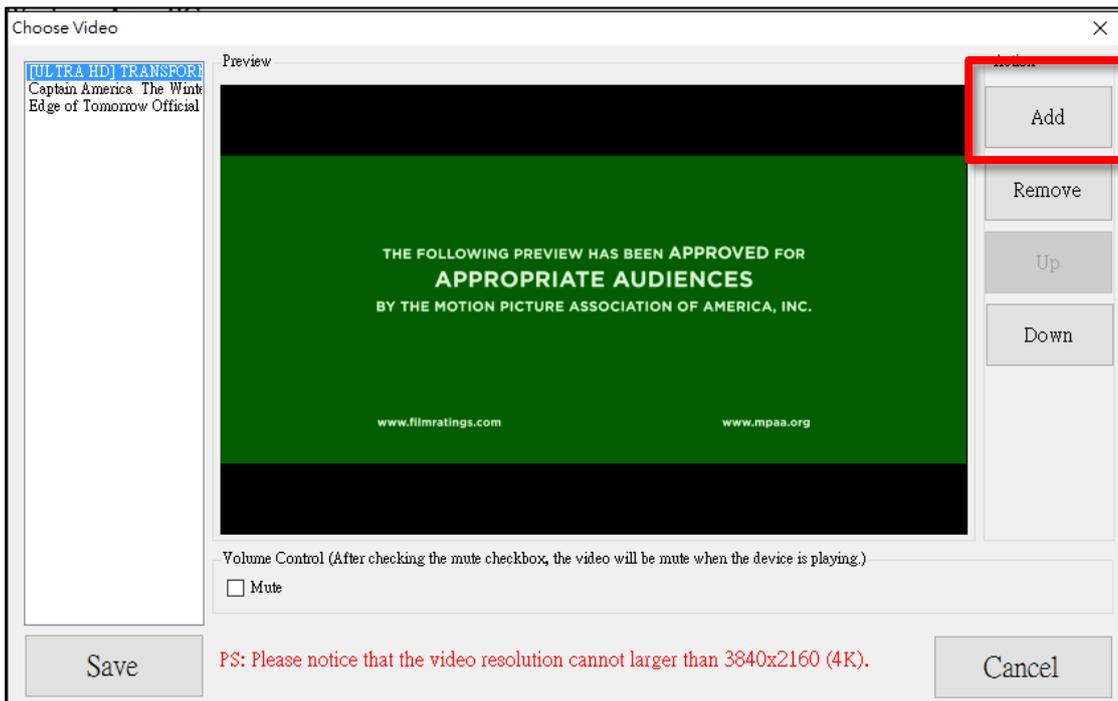

Browser the Video file (support multi videos) and click Open.

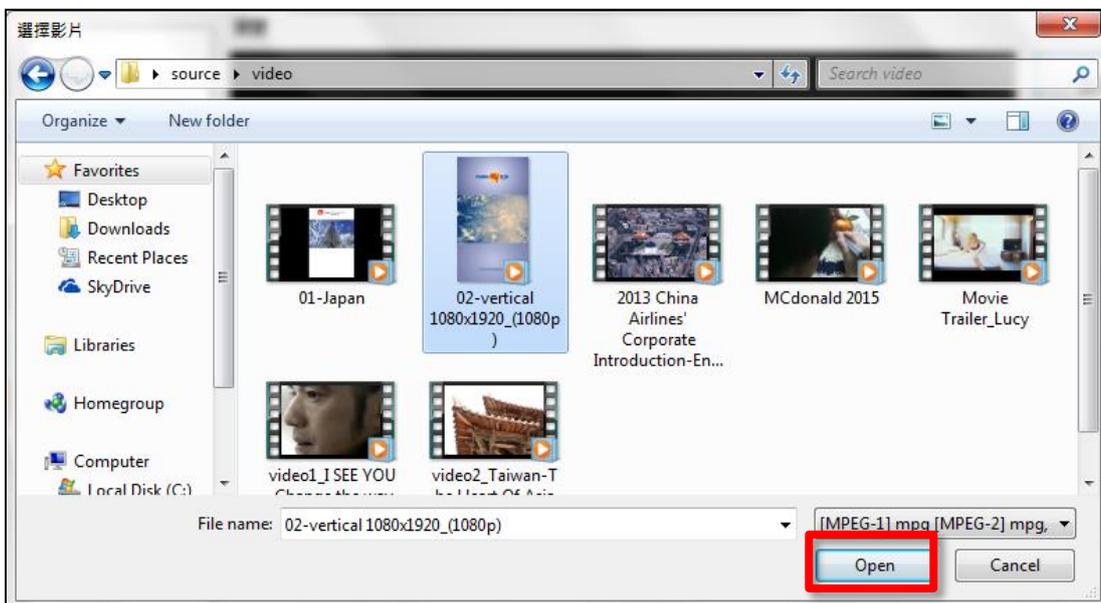

Choose video at the left hand side, video will be played at the middle area and click Save button.

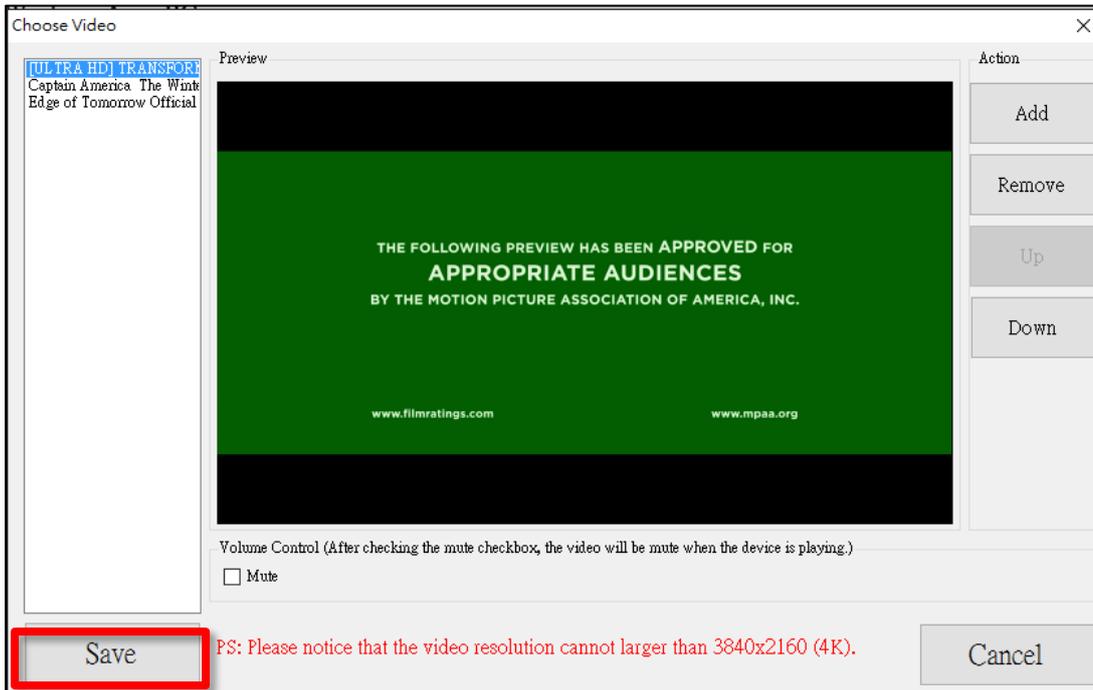


4.3 YouTube (This function is no longer available)

Notice : This Function is no longer available because the new police of YouTube.

4.4 Streaming video


Click Streaming video and key in the web address of streaming video and click Done button.

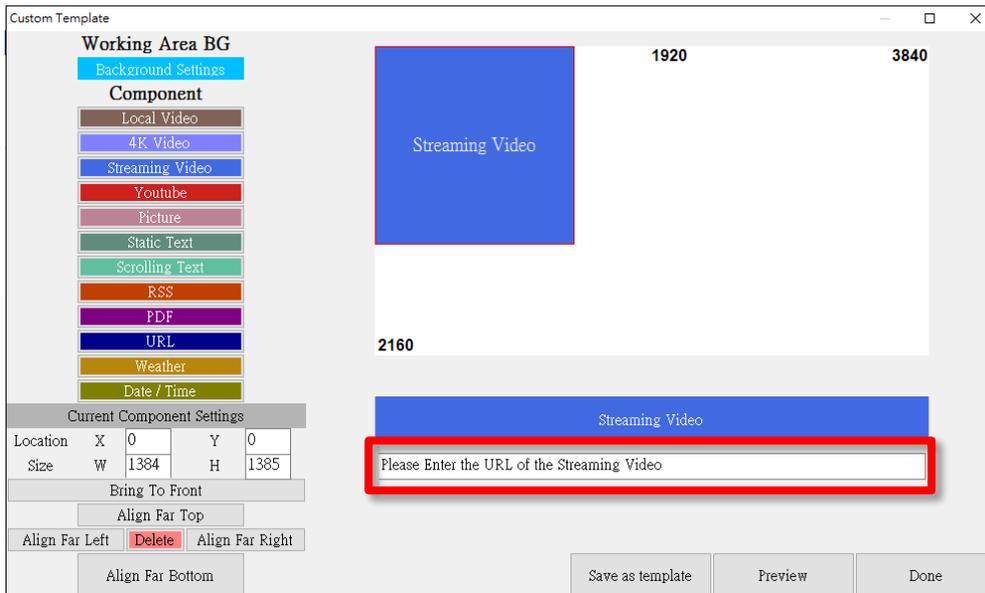


5. Image

5.1 Picture

Click Picture button at the left hand side and Picture component display in your working area

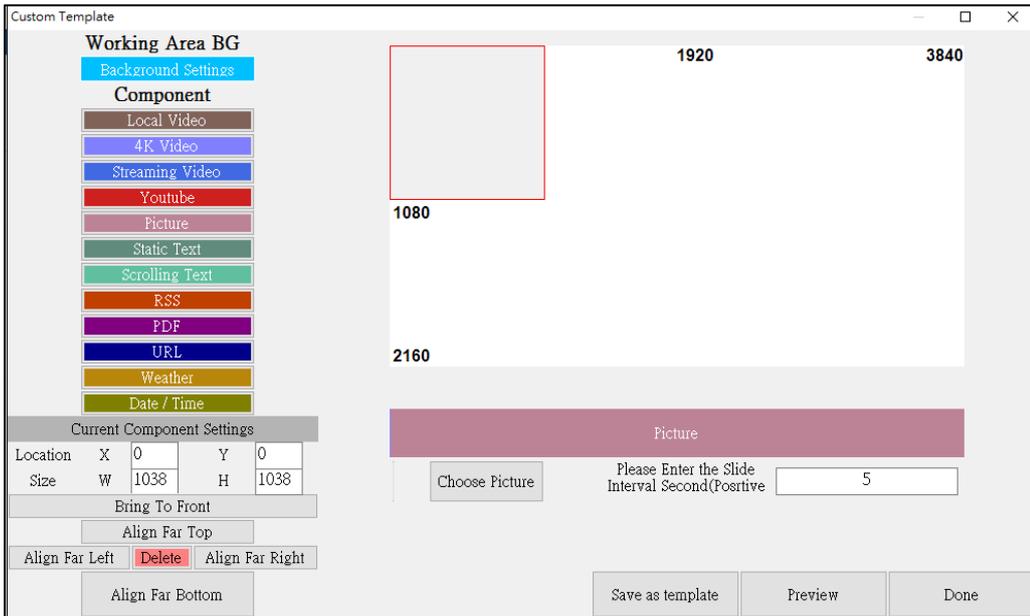


Click Choose Picture button.

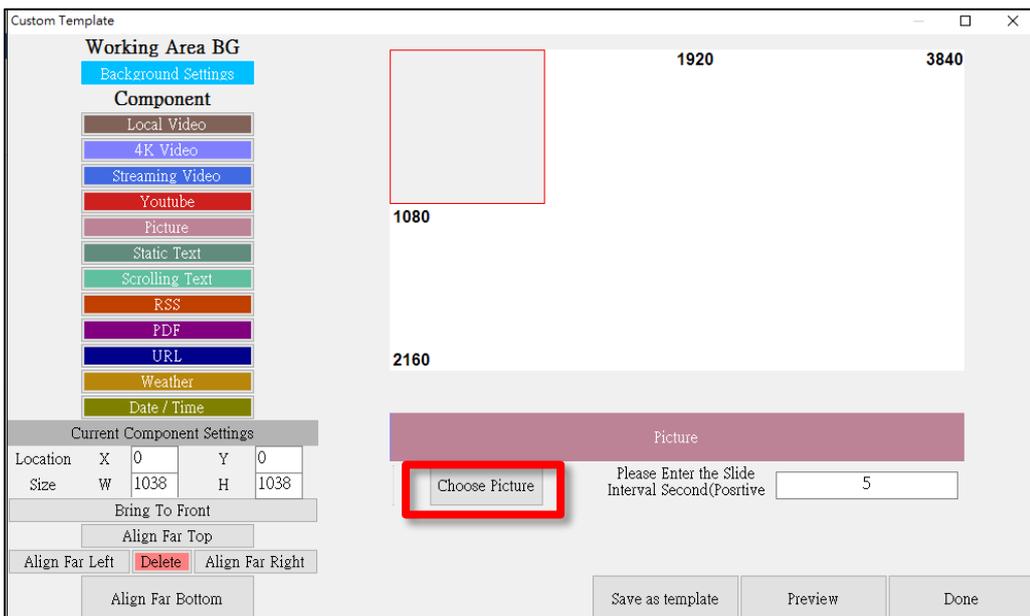


Click Add button



Browser the Picture file (support multi pictures) and click Open.

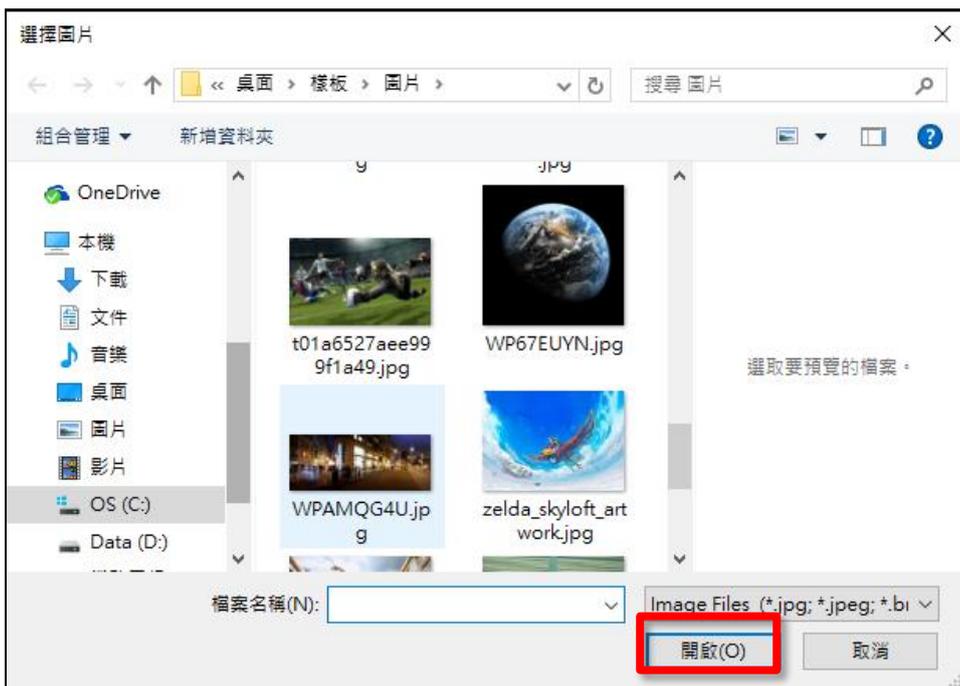


Choose picture at the left hand side, picture will show at the middle area and click Save button.

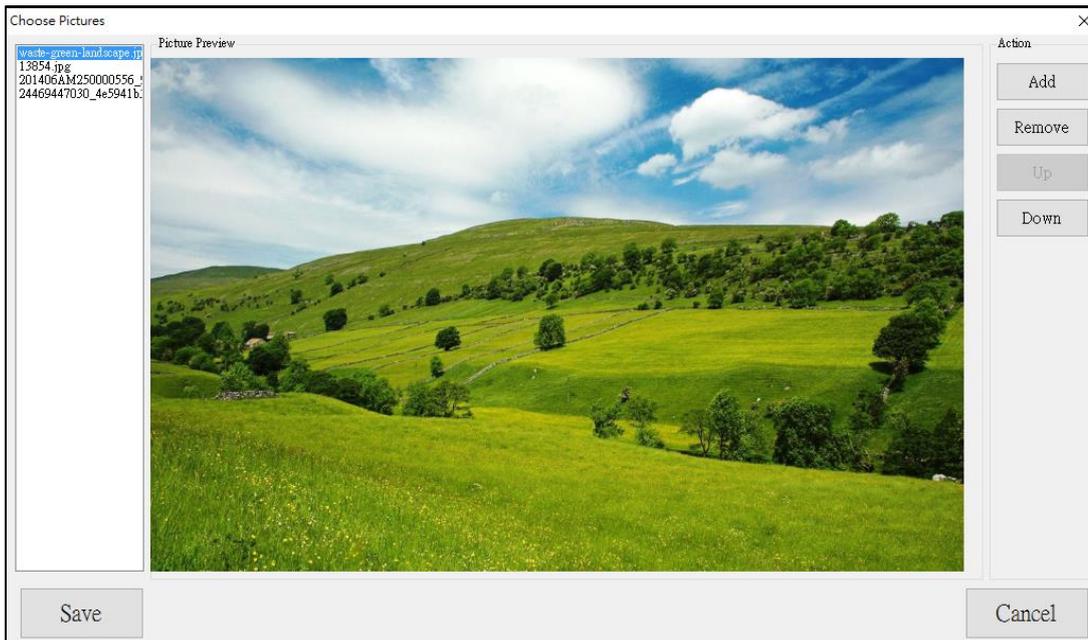

5.2 PDF


Click PDF button at the left hand side and PDF component display in your working area. Click Choose Picture button and add PDF you want.

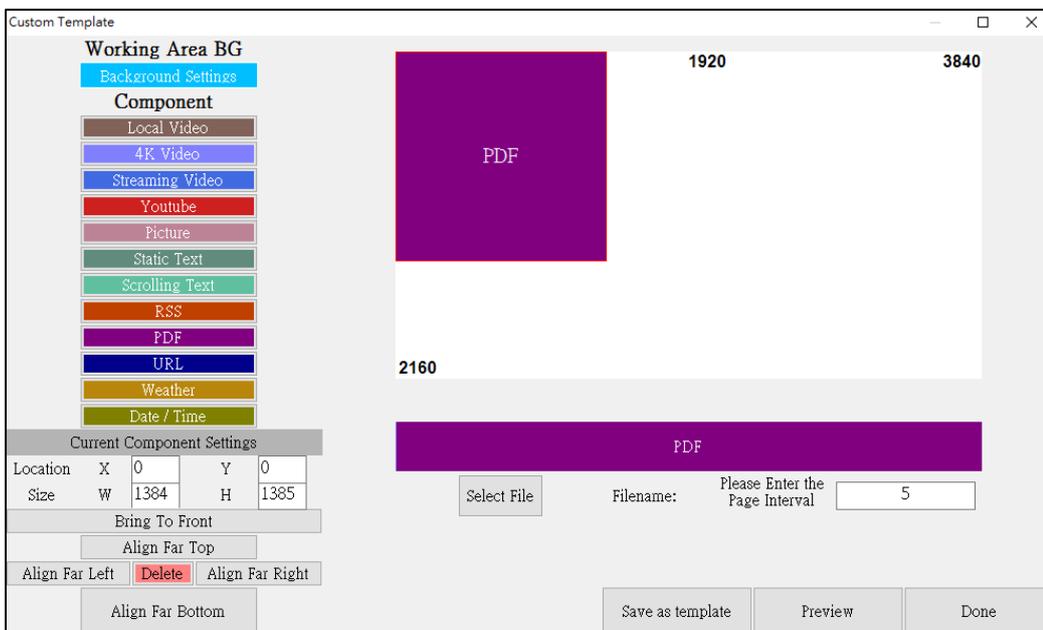

6. Text


6.1 Static Text

Click Static text button and key in the text you want to display and click Done button.

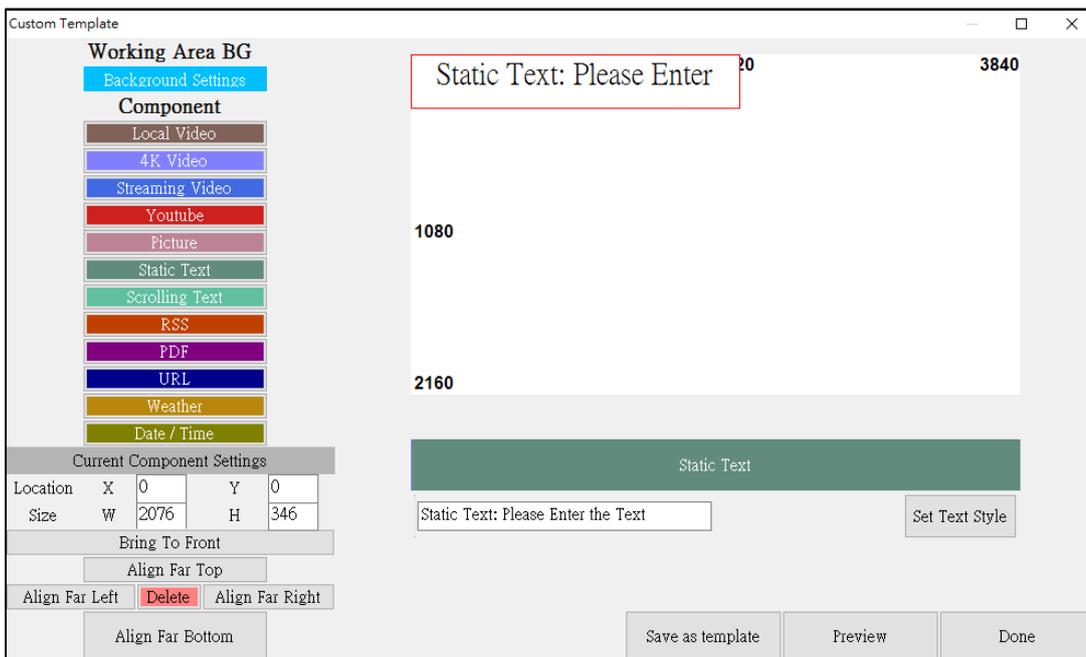


When you click Set Text Style button, Text style sheet dialog shown as below.

You can change Text : font size, text color and font style. Background : background color or background image. Direction : move direction from right to left or left to right.

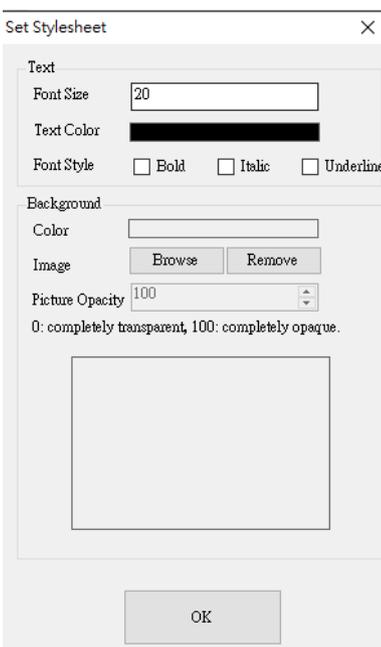


6.2 Scrolling Text

Click Scrolling text button and key in the text you want to display and click Done button.

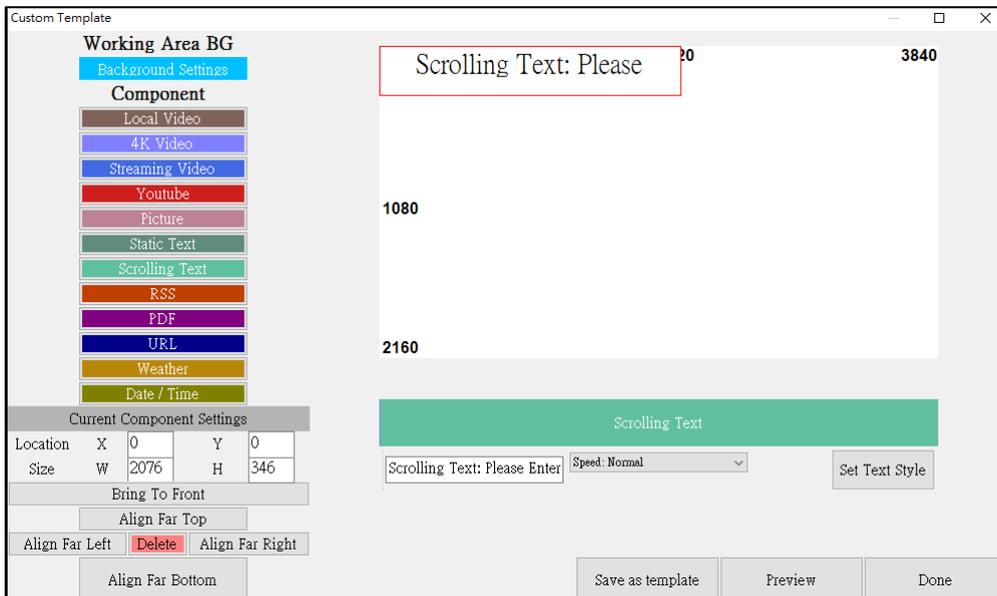


When you click Set Text Style button, Text style sheet dialog shown as below.

You can change Text : font size, text color and font style. Background : background color or background image. Direction : move direction from right to left or left to right.

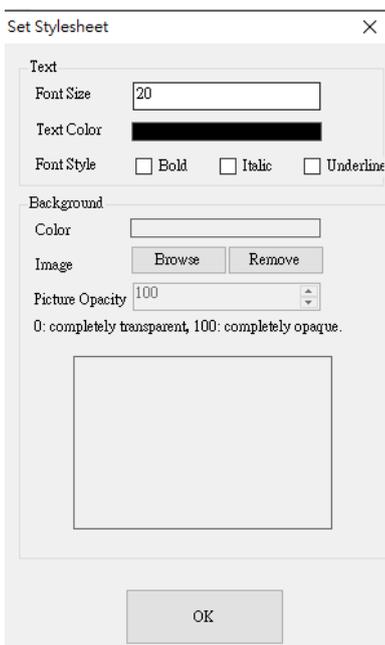

6.3 RSS

Click RSS and key in the web address of RSS and click Done button.

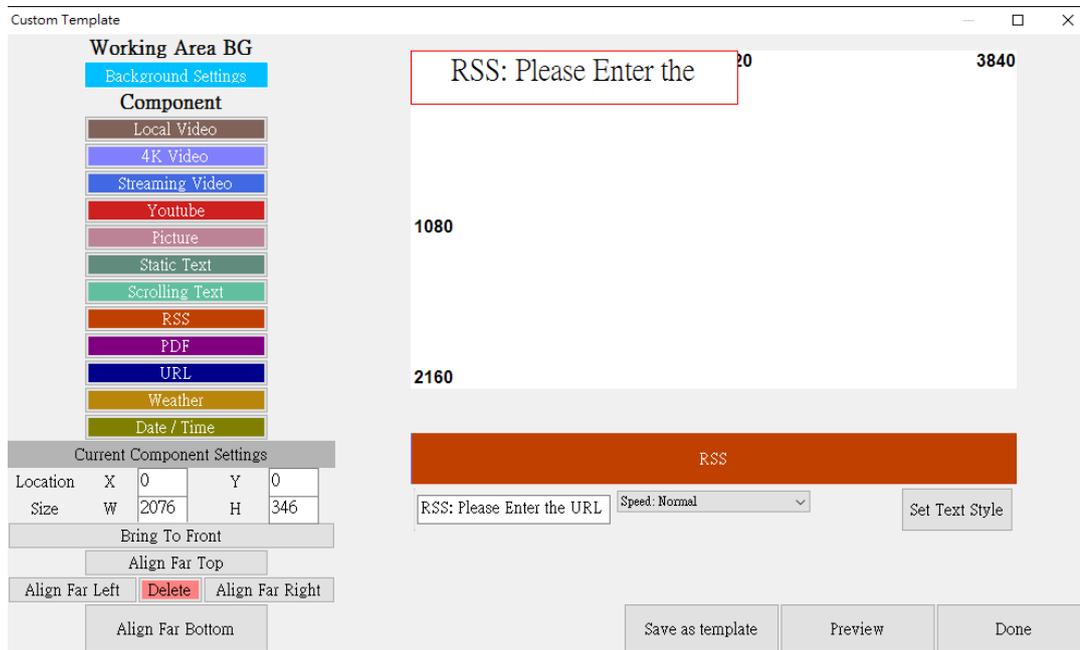


7. Weather (This function is no longer available)

Notice : This Function is no longer available because the new police of weather website.


8. Date/Time

Click Date/Time and click Done button.

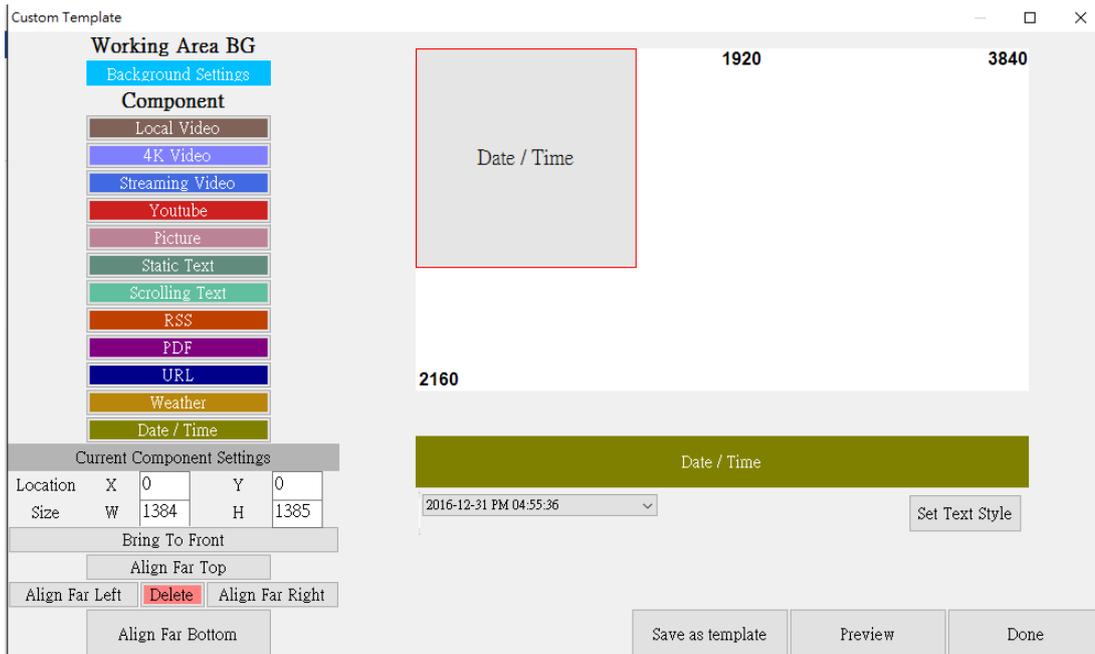


9. URL

Click URL and key in the web address you want and click Done button.

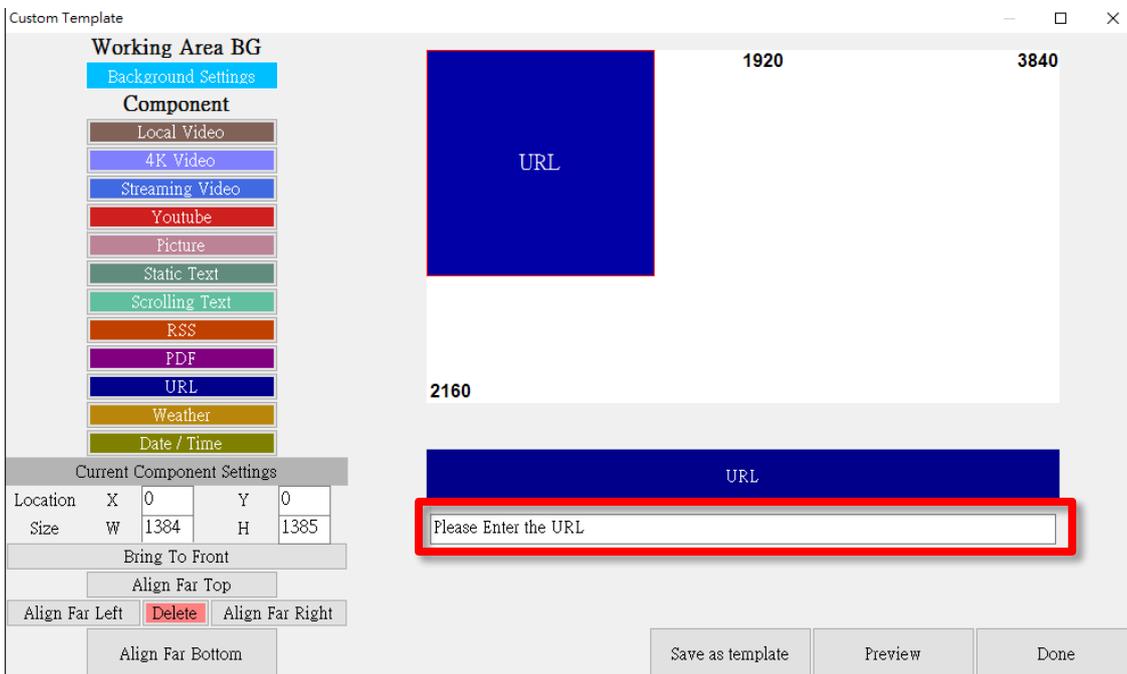


10. Settings

Click the Settings button to schedule the play content.

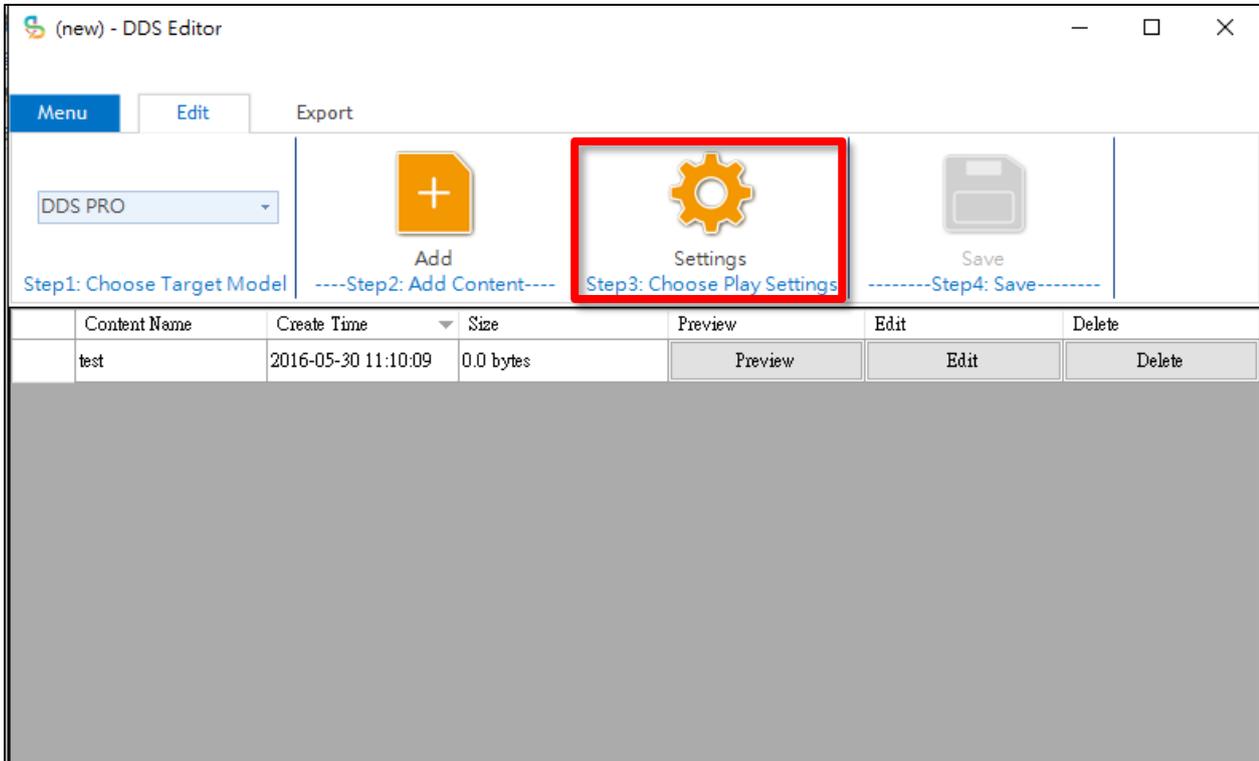


10.1 Loop Play

Tap Loop Play and select the content name and click OK button.

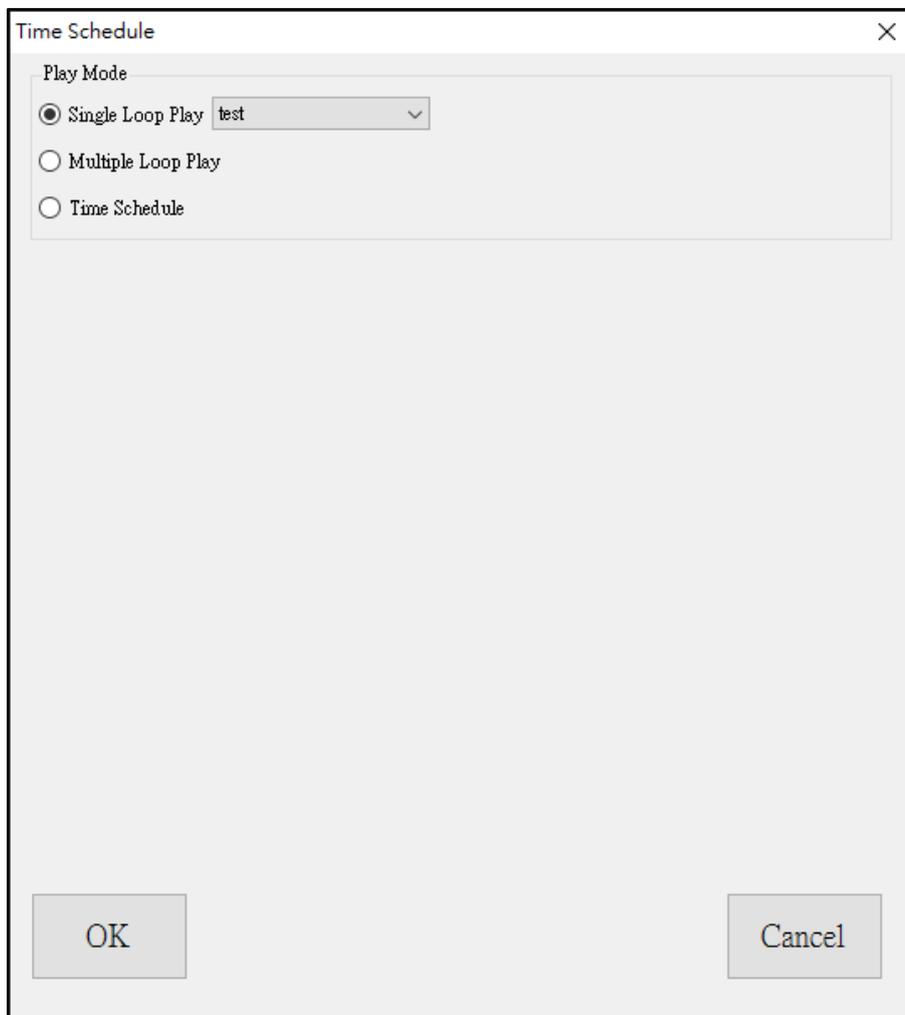


10.2 Multiple Loop Play

Tap Multiple Loop Play and click add to add new schedule. Key in play time length for your content and click OK button.

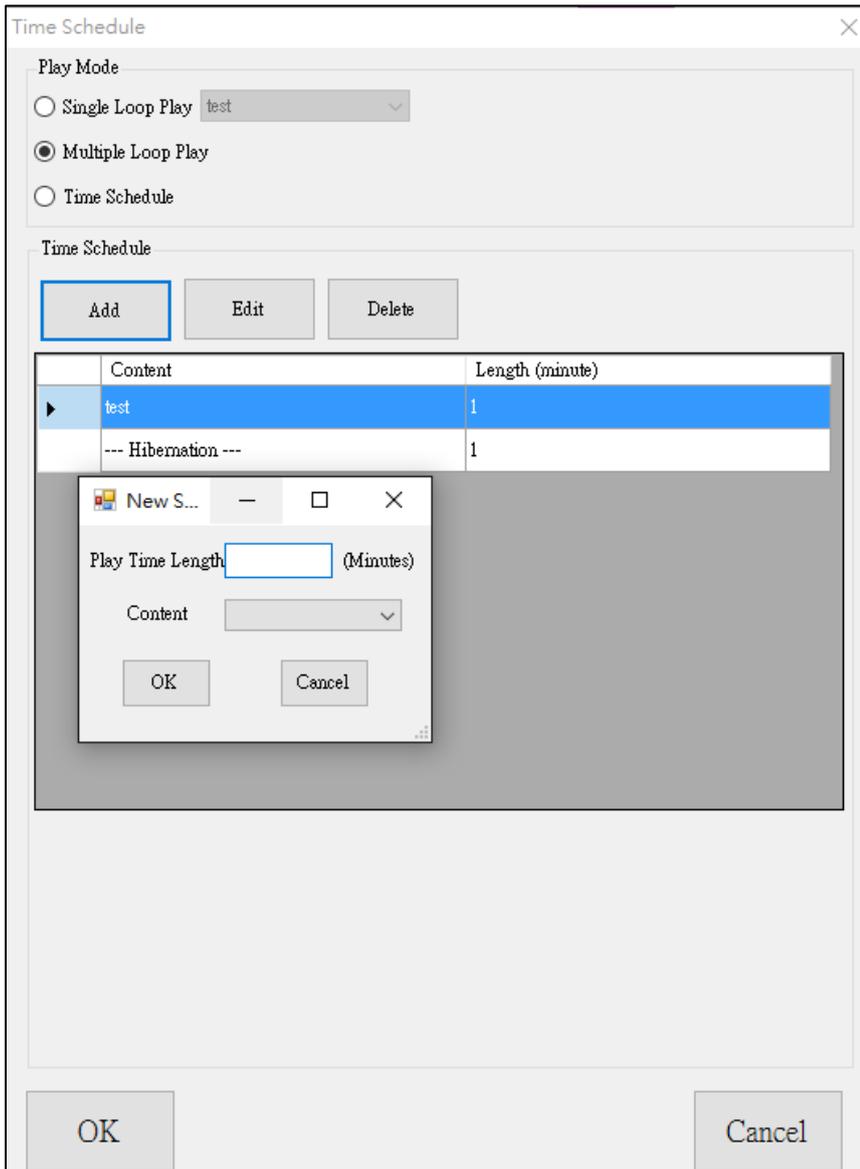


10.3 Time Schedule

Click Add button to add new time schedule. Set Start time, End time and select the play content (support hibernation). Click the ok button to finish the schedule.

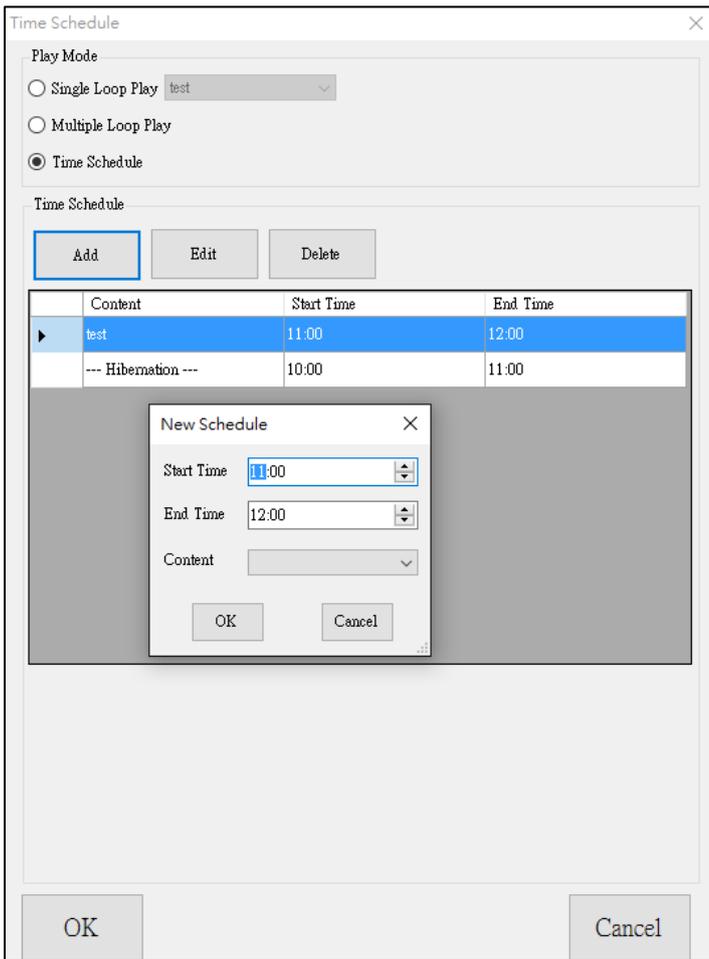


11. Save

Click the save button on the top.

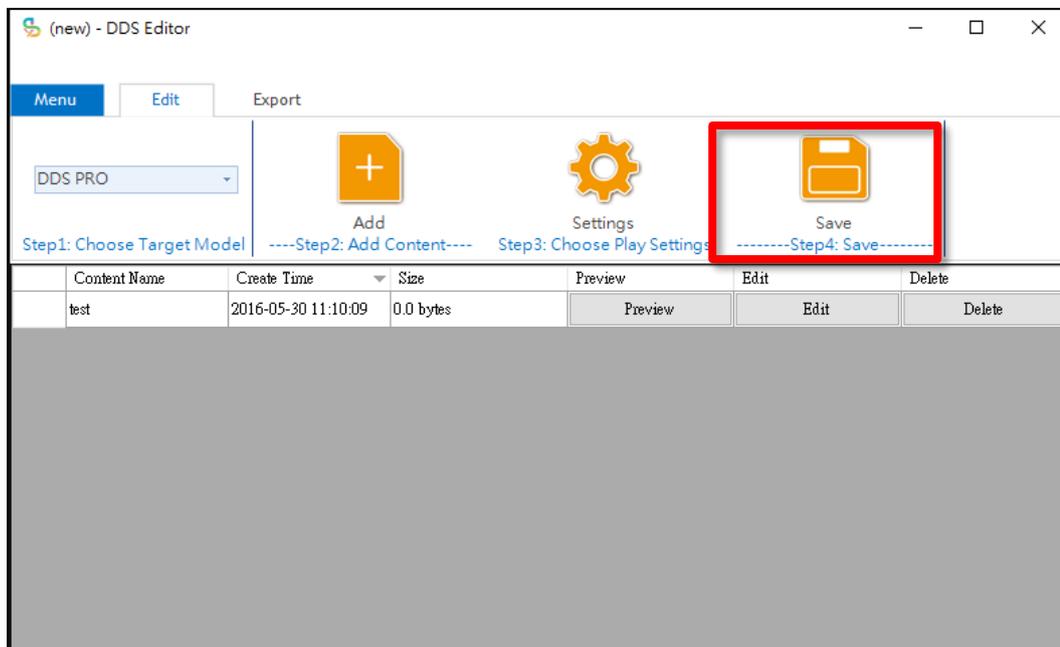


Select the place and enter the DDS file name, then, click Save button.

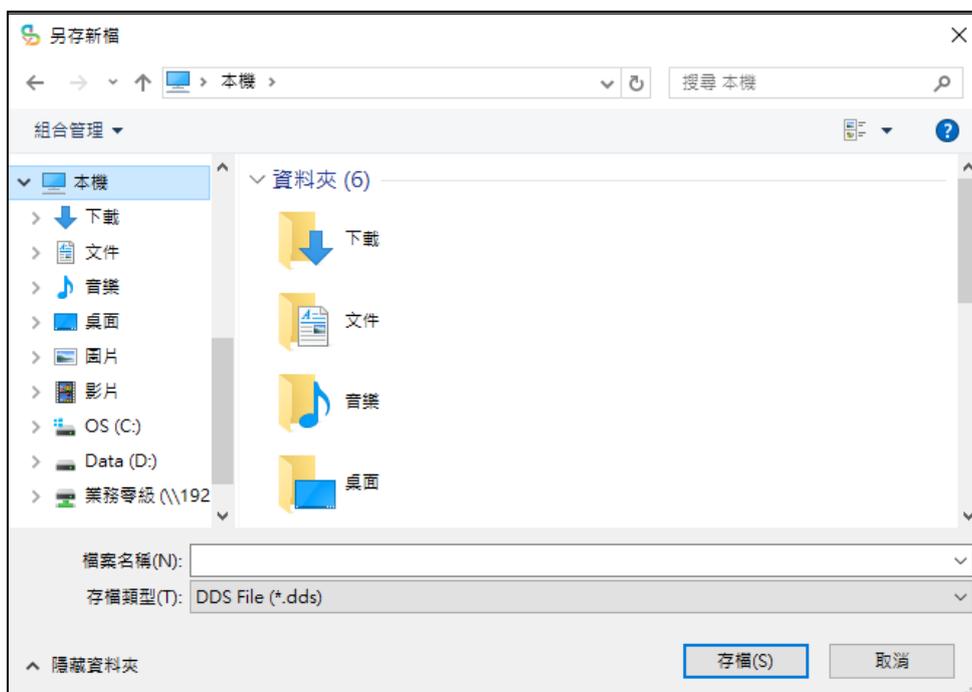


12. Export

12.1 By USB/SD

Insert your USB/SD card to your PC for preparing export DDS file and click the Export on F:\ item.

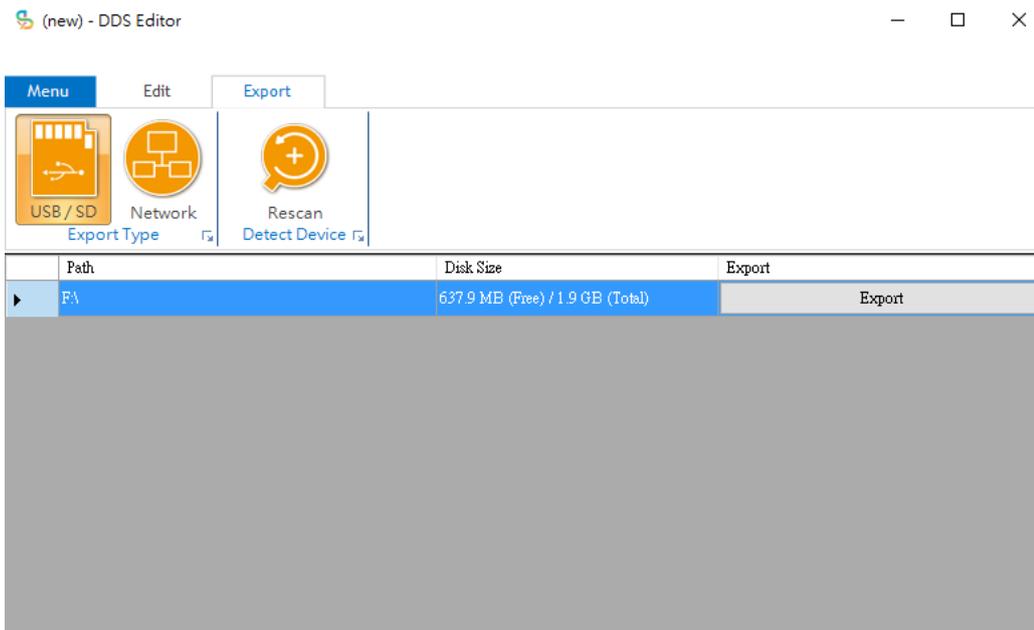


Click Yes button to make sure export the DDS file.

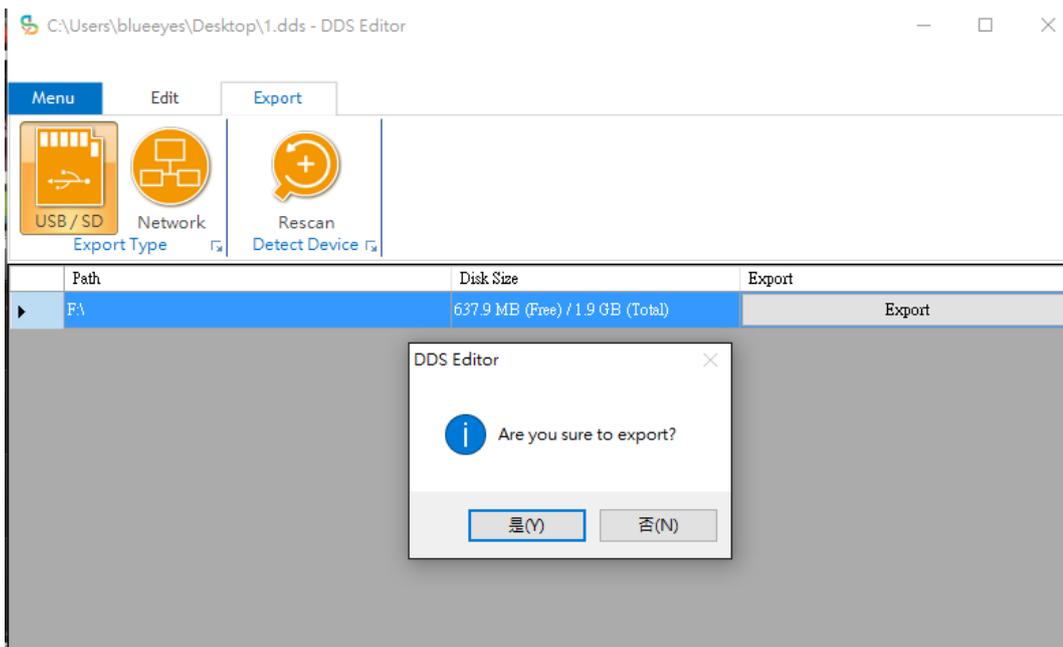

12.2 Through Network

Click Network button and click Yes button to search the online device immediately.

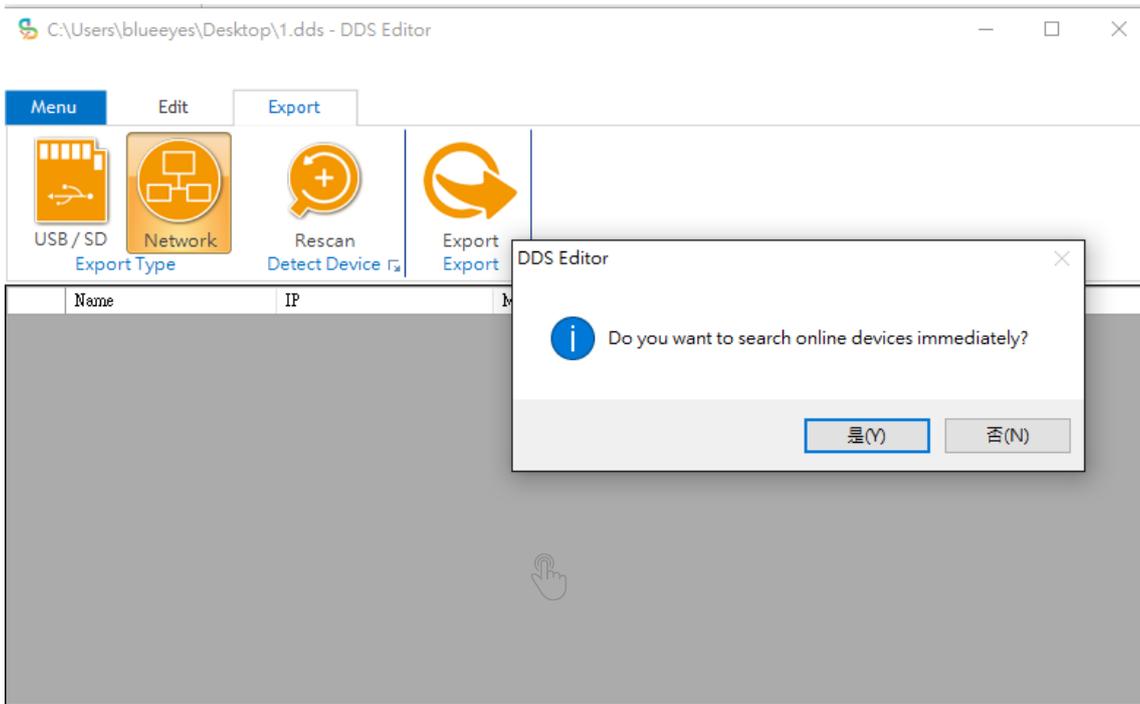

You will see Network scan form dialog message :

- (1) DDS Editor will automatically detect the digital signage devices. Device name and IP will display below the dialog.
- (2) You can also key in the device IP address to add it by manual.



Scanning

Information: Please check the UPnP of this subnet router is enabled and the devices are connected to the Internet. The devices and the computer MUST be in the same subnet. If you stay in this form more than one minute and the devices are not detected, please check the router settings , firewall settings, and the connection status of devices .

Manual

If you know the IP address of the devices, you can add it by manual.

IP

Add

The below is the digital signage devices which detected:

Close

BlueEyes[®]
<http://www.BlueEyes.com.tw>